

इंटरनेट

मानक

Disclosure to Promote the Right To Information

Whereas the Parliament of India has set out to provide a practical regime of right to information for citizens to secure access to information under the control of public authorities, in order to promote transparency and accountability in the working of every public authority, and whereas the attached publication of the Bureau of Indian Standards is of particular interest to the public, particularly disadvantaged communities and those engaged in the pursuit of education and knowledge, the attached public safety standard is made available to promote the timely dissemination of this information in an accurate manner to the public.

“जानने का अधिकार, जीने का अधिकार”

Mazdoor Kisan Shakti Sangathan

“The Right to Information, The Right to Live”

“पुराने को छोड़ नये के तरफ”

Jawaharlal Nehru

“Step Out From the Old to the New”

IS 14849-3 (2005): Hydraulic Fluid Power - Determination of Characteristics of Motors, Part 3: At Constant flow and at constant torque [PGD 16: Fluid Power]



“ज्ञान से एक नये भारत का निर्माण”

Satyanarayan Gangaram Pitroda

“Invent a New India Using Knowledge”



“ज्ञान एक ऐसा खजाना है जो कभी चुराया नहीं जा सकता है”

Bhartrhari—Nitiśatakam

“Knowledge is such a treasure which cannot be stolen”

BLANK PAGE



भारतीय मानक

हाइड्रोलिक द्रव पावर — मोटरों के अभिलक्षण ज्ञात करना

भाग 3 निरंतर प्रवाह और सतत टोर्क पर

Indian Standard

HYDRAULIC FLUID POWER — DETERMINATION OF CHARACTERISTICS OF MOTORS

PART 3 AT CONSTANT FLOW AND AT CONSTANT TORQUE

ICS 23.100.10

© BIS 2005

BUREAU OF INDIAN STANDARDS

MANAK BHAVAN, 9 BAHADUR SHAH ZAFAR MARG

NEW DELHI 110002

NATIONAL FOREWORD

This Indian Standard (Part 3) which is identical with ISO 4392-3 : 1993 'Hydraulic fluid power — Determination of characteristics of motors — Part 3 : At constant flow and at constant torque' issued by the International Organization for Standardization (ISO) was adopted by the Bureau of Indian Standards on the recommendations of the Hydraulic Fluid Power Systems Sectional Committee and approval of the Medical Instruments, General and Production Engineering Division Council.

In hydraulic fluid power systems, power is transmitted and controlled through a liquid under pressure within an enclosed circuit. Hydraulic motors are units which transform hydraulic energy into mechanical energy, usually with a rotary output.

This Standard has been issued in several parts. Other parts of this Indian Standard are:

IS 14849 (Part 1) : 2000 Hydraulic fluid power — Determination of characteristics of motors:
Part 1 At constant low speed and at constant pressure

IS 14849 (Part 2) : 2000 Hydraulic fluid power — Determination of characteristics of motors:
Part 2 Startability

The text of the ISO Standard has been approved as suitable for publication as an Indian Standard without deviations. Certain conventions are, however, not identical to those used in Indian Standards. Attention is particularly drawn to the following:

- a) Wherever the words 'International Standard' appear referring to this standard, they should be read as 'Indian Standard'.
- b) Comma (,) has been used as a decimal marker in the International Standard while in Indian Standards, the current practice is to use a point (.) as the decimal marker.

In this adopted standard, reference appears to certain International Standards for which Indian Standards also exist. The corresponding Indian Standards which are to be substituted in their places are listed below along with their degree of equivalence for the editions indicated:

<i>International Standard</i>	<i>Corresponding Indian Standard</i>	<i>Degree of Equivalence</i>
ISO 1219-1 : 1991 Fluid power systems and components — Graphic symbols and circuit diagrams — Part 1: Graphic symbols	IS 7513 : 1974 Graphic symbols for fluid power systems	Technically equivalent
ISO 3448 : 1992 Industrial liquid lubricants — ISO viscosity classification	IS 9466 : 1980 Viscosity classification of industrial liquid lubricants	do
ISO 4391 : 1983 Hydraulic fluid power — Pumps, motors and integral transmissions — Parameter definitions and letter symbols	IS 11147 : 1984 Recommendations and letter symbols for hydraulic fluid power pumps, motors and integral transmissions	Identical
ISO 4409 : 1986 Hydraulic fluid power — Positive displacement pumps, motors and integral transmissions — Determination of steady-state performance	IS 10069 : 1992 Hydraulic fluid power — Positive displacement pumps, motors and integral transmissions — Determination of steady-state performance (<i>first revision</i>)	do

(Continued on third cover)

Indian Standard

HYDRAULIC FLUID POWER — DETERMINATION OF CHARACTERISTICS OF MOTORS

PART 3 AT CONSTANT FLOW AND AT CONSTANT TORQUE

1 Scope

This part of ISO 4392 describes a method of determining the low-speed characteristics of positive-displacement rotary fluid power motors under constant flow and constant torque conditions. Motors may be of either the fixed or variable-displacement type.

The method involves testing at slow speeds, which may generate frequencies having a significant influence upon the steady continuous torque output of the motor and affect the system to which the motor would be connected.

The accuracy of measurement is divided into three classes, A, B and C, which are explained in annex A.

2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this part of ISO 4392. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this part of ISO 4392 are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 1219-1:1991, *Fluid power systems and components — Graphic symbols and circuit diagrams — Part 1: Graphic symbols.*

ISO 3448:1992, *Industrial liquid lubricants — ISO viscosity classification.*

ISO 4391:1983, *Hydraulic fluid power — Pumps, motors and integral transmissions — Parameter definitions and letter symbols.*

ISO 4409:1986, *Hydraulic fluid power — Positive displacement pumps, motors and integral transmissions — Determination of steady-state performance.*

ISO 5598:1985, *Fluid power systems and components — Vocabulary.*

ISO 8426:1988, *Hydraulic fluid power — Positive displacement pumps and motors — Determination of derived capacity.*

3 Definitions

For the purposes of this part of ISO 4392, the definitions given in ISO 4391 and ISO 5598 and the following definition apply.

3.1 complete motor cycle: The total angular movement of the motor output shaft needed to achieve a repetitive leakage and/or torque recording. In most motors this will be 360°; however, in some, such as gear motors, it may be several shaft revolutions.

4 Symbols

4.1 The physical quantity letter symbols and their suffixes used in this part of ISO 4392 are in accordance with ISO 4391. Units are given in table 1.

4.2 The graphical symbols used in figure 1 are in accordance with ISO 1219-1.

Table 1 — Symbols and units

Quantity	Symbol	Dimension ¹⁾	SI unit ²⁾
Rotational speed	n	T^{-1}	r/min
Pressure, differential pressure	$p, \Delta p$	$ML^{-1}T^{-2}$	Pa
Flowrate	q	L^3T^{-1}	m ³ /min
Torque	T	ML^2T^{-2}	N·m
Time	t	T	s
Swept volume	V	L^3	m ³
Temperature	θ	Θ	°C

1) M = mass; L = length; T = time; Θ = temperature.
2) The practical units which may be used for the presentation of results are given in annex B.

5 Test installation

5.1 Hydraulic test circuit

5.1.1 A hydraulic test circuit similar to that shown in figure 1 shall be used.


WARNING — The basic circuit shown in figure 1 does not incorporate all the safety devices necessary to protect against damage in the event of component failure. It is important that those responsible for carrying out these tests give due consideration to safeguarding both staff and equipment.

5.1.2 A fluid-conditioning circuit (figure 1) together with shut-off valve 5 and relief valve 7 shall be installed. Valve 5 may be opened to facilitate operation at high speed in order to reach the test operating temperature rapidly (see 8.2). Valve 5 shall be closed during the test.

5.1.3 A fluid-conditioning circuit shall be installed which provides the filtration necessary to protect the test motor and the other circuit components and which will maintain the fluid temperatures specified in clause 7.

5.1.4 A constant motor supply flowrate is obtained by a flow control valve with viscosity and pressure compensation.

5.1.5 Constant torque load can be obtained using a positive-displacement pump and a flow control valve with a torque signal electric feedback (or a magnetic power brake or any other suitable system).

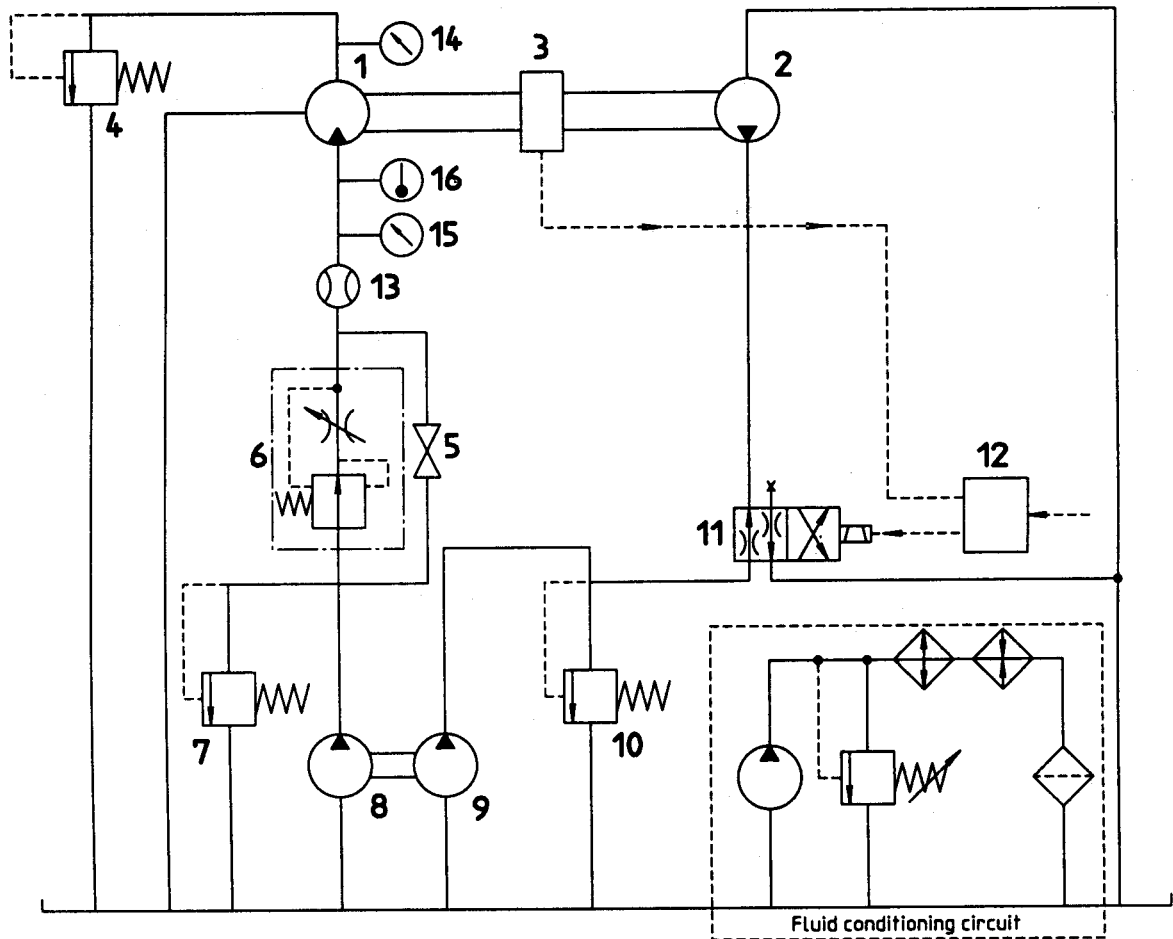

Key

- 1** Motor under test
- 2** Constant torque load (positive-displacement pump)
- 3** Torque, rotational speed and rotational angle meter
- 4,7** Relief valves
- 5** Shut-off valve
- 6** Constant flow device
- 8,9** Displacement pumps
- 10,11,12** Torque control devices
- 13** Flowmeter
- 14,15** Pressure indicators
- 16** Temperature indicator

Figure 1 — Typical hydraulic test circuit

5.2 Test apparatus

5.2.1 A test rig shall be set up which makes use of the test circuit specified in 5.1 and which provides the equipment shown in figure 1.

5.2.2 A positive-locking device shall be provided on continuously variable displacement motors to prevent the displacement inadvertently changing during the pertinent portion of each test.

5.3 Instrumentation

5.3.1 Measuring instruments shall be selected and installed to measure the following test motor data:

- a) inlet flow;
- b) inlet temperature (see ISO 4409 for guidance on location of the tapping point);
- c) inlet and outlet pressures (see ISO 4409 for guidance on location of tapping points);
- d) output torque;
- e) speed and angular position of the motor shaft.

5.3.2 The systematic errors of the measuring instruments shall be consistent with the chosen class of measurement accuracy (see annex A).

5.3.3 Appropriate recording instruments shall be selected and installed which are capable of resolving signals at frequencies greater than 10 times the highest expected fundamental data frequency.

5.3.4 The test measurements should be taken at equal increments of shaft angle, and their number should be a minimum of ten times the number of displacement pulses per revolution as obtained under 6.1 b).

6 Pretest data

6.1 Using the motor manufacturer's data and other known facts, gather the pretest data as follows.

- a) Calculate the rated (geometric or theoretical) torque of the motor ($T_{g,n}$ or $T_{i,n}$) based upon its geometric or theoretical displacement at rated pressure, using the formula

$$T_{g,n} = \frac{\Delta p_n \times V_g}{2\pi}$$

or

$$T_{i,n} = \frac{\Delta p_n \times V_i}{2\pi}$$

where

Δp_n is the rated differential pressure;

V_g is the geometric swept volume;

V_i is the derived swept volume (see ISO 8426).

- b) Determine the number of displacement pulses per revolution of the motor shaft, taking into account any gearing which would influence the frequency.

c) Calculate the fundamental data frequency, f_e , in hertz, using the formula

$$f_e = \frac{n_e}{60} \times \text{number of displacement pulses}$$

where n_e is the test speed, in revolutions per minute (r/min). The number of displacement pulses is taken from 6.1 b).

6.2 Using the motor manufacturer's recommended value for rated speed, n_n , calculate the ideal (geometric or theoretical) flow at rated speed, $q_{v_{g,n}}$ or $q_{v_{i,n}}$, using the formula

$$q_{v_{g,n}} = n_n \times V_g$$

or

$$q_{v_{i,n}} = n_n \times V_i$$

6.3 Determine the fluid viscosity in accordance with ISO 3448.

6.4 Estimate the maximum output torque expected to be produced by the motor during the test using the rated torque, $T_{g,n}$ or $T_{i,n}$ [as determined in 6.1 a)].

6.5 The moment of inertia of all the rotating components connected to the motorshaft and the volume between the flow-control valve and the motor inlet port should be kept to a minimum.

7 Test conditions

The following test conditions shall apply:

- a) fluid temperature, θ , at motor inlet: either 50 °C or 80 °C;
- b) use a hydraulic fluid of a type and viscosity approved by the hydraulic motor manufacturer, appropriate to the test temperature selected;
- c) carry out tests at 50 % and 100 % of the motor rated torque;
- d) for the two torque conditions given in clause 7 c), establish the minimum inlet flow; the lowest possible flow is that which causes the motor to stop rotating;
- e) for variable-displacement motors, select the minimum and maximum displacements recommended by the manufacturer; then test at these minimum and maximum displacements;
- f) for reversible motors, carry out the test in both directions of rotation.

8 Test procedure

8.1 Connect the instrumentation and recording apparatus to record the motor test data as listed in 5.3.1 and shown in figure 1.

NOTE 1 Before starting the test, fill the motor case with fluid, if necessary.

8.2 Operate the test circuit before taking measurements, in order to stabilize the system temperature.

8.3 Hold the torque as constant as possible, while peak-to-peak torque variations should be at least within 4 % of the mean value. The requirement specified in 5.3.3 shall be taken into consideration.

8.4 Hold the flow as constant as possible, and record it. Instantaneous flow variation shall be kept to within 4 % of the mean value in accordance with the specifications given in 5.3.3.

8.5 Maintain the measured inlet fluid temperature constant to within ± 2 °C for the duration of a recording.

8.6 Make simultaneous recordings of the variables listed in 5.3.1 for the required test conditions.

8.7 Extend the recording to as many revolutions as are necessary to achieve one complete motor cycle.

8.8 When using digital data acquisition techniques, select a sample interval which provides 95 % confidence that the maximum and minimum values of speed and pressure have been determined by pretesting.

9 Expression of results

NOTE 2 Refer to clause 4 for an explanation of symbols and suffixes.

9.1 Determine the speed n_{φ} for equally distributed positions over one complete motor cycle.

Calculate the mean speed over one complete motorcycle, n_{ma} :

$$n_{ma} = \frac{n_{\varphi 1} + n_{\varphi 2} + n_{\varphi 3} + \dots + n_{\varphi z}}{z}$$

where

the suffixes $\varphi 1, \varphi 2, \varphi 3 \dots \varphi z$, are the respective selected shaft positions;

z is the number of readings per complete motor cycle, in compliance with 5.3.4.

9.2 Calculate the speed irregularity at each selected shaft position Δn_{φ} , using the following formula:

$$\Delta n_{\varphi} = |n_{ma} - n_{\varphi}|$$

9.3 Calculate the mean speed irregularity over one complete motor cycle, Δn_{ma} :

$$\Delta n_{ma} = \frac{\Delta n_{\varphi 1} + \Delta n_{\varphi 2} + \Delta n_{\varphi 3} + \dots + \Delta n_{\varphi z}}{z}$$

9.4 Determine the speed irregularity index, Ir_n , using the following formula:

$$Ir_n = \frac{\Delta n_{ma}}{n_{ma}}$$

or

$$Ir_n = \frac{|n_{ma} - n_{\varphi 1}| + |n_{ma} - n_{\varphi 2}| + \dots + |n_{ma} - n_{\varphi z}|}{n_{\varphi 1} + n_{\varphi 2} + \dots + n_{\varphi z}}$$

9.5 Calculate the average volumetric efficiency, $\eta_{v,ma}$, for at least one complete motor cycle using the following formula:

$$\eta_{v,ma} = \frac{V_{i,ma} \cdot n_{ma}}{q_{V_e}}$$

where

$V_{i,ma}$ is the average derived swept volume (see ISO 8426:1988, B.2);

n_{ma} is the mean rotational speed;

q_{V_e} is the volume flowrate.

9.6 Calculate the relative peak-to-peak variation in speed δn , using the following formula:

$$\delta n = \frac{n_{max} - n_{min}}{n_{ma}}$$

9.7 Determine the effective differential pressure, $\Delta p_{e,\varphi}$, for the selected positions over one shaft revolution:

$$\Delta p_{e,\varphi} = p_{1,\varphi} - p_{2,\varphi}$$

where

p_1 is the inlet pressure;

p_2 is the outlet pressure.

9.8 Calculate the mean effective differential pressure, $\Delta p_{e,ma}$, over one complete motor cycle using the following formula:

$$\Delta p_{e,ma} = \frac{\Delta p_{e,\varphi 1} + \Delta p_{e,\varphi 2} + \dots + \Delta p_{e,\varphi z}}{z}$$

9.9 Calculate the pressure irregularity, $\Delta(\Delta p_e)$, for each selected shaft position using the following formula:

$$\Delta(\Delta p_{e,\varphi}) = |\Delta p_{e,ma} - \Delta p_{e,\varphi}|$$

9.10 Calculate the mean differential pressure irregularity, $\Delta(\Delta p_{e,ma})$, over one complete motor cycle using the following formula:

$$\Delta(\Delta p_{e,ma}) = \frac{\Delta(\Delta p_{e,\varphi 1}) + \Delta(\Delta p_{e,\varphi 2}) + \dots + \Delta(\Delta p_{e,\varphi z})}{z}$$

9.11 Determine the differential pressure irregularity index, $Ir_{\Delta p}$, using the following formula:

$$Ir_{\Delta p} = \frac{\Delta(\Delta p_{e,ma})}{\Delta p_{e,ma}}$$

or

$$Ir_{\Delta p} = \frac{|\Delta p_{e,ma} - \Delta p_{e,\varphi 1}| + |\Delta p_{e,ma} - \Delta p_{e,\varphi 2}| + \dots + |\Delta p_{e,ma} - \Delta p_{e,\varphi z}|}{\Delta p_{e,\varphi 1} + \Delta p_{e,\varphi 2} + \dots + \Delta p_{e,\varphi z}}$$

9.12 Calculate the average hydraulic mechanical efficiency, $\eta_{hm,ma}$, using the following formula:

$$\eta_{hm,ma} = \frac{T_e}{\Delta p_{e,ma} \times \frac{V_{i,ma}}{2\pi}}$$

9.13 Calculate the relative peak-to-peak variations of differential pressure, $\delta\Delta p$, using the following formula:

$$\delta\Delta p = \frac{\Delta p_{e,max} - \Delta p_{e,min}}{\Delta p_{e,ma}}$$

10 Test report

10.1 General

The relevant test data using the test torque and flow conditions and the information listed in 10.3 shall be recorded in a test report.

10.2 Presentation of test data

All test measurements and the results of the calculations derived from the measurements shall be presented in tabular form and, where appropriate, graphically.

10.3 Test data

10.3.1 General

The following data shall be included in the test report:

- a) a description of the motor;
- b) the class of measurement accuracy used (see annex A);
- c) a description of the hydraulic test circuit and components;
- d) a description of the test fluid;
- e) the fluid viscosity (see 6.3).

10.3.2 Test results

The target values of torque and flow under which the tests were performed shall be recorded, together with the following information:

- a) the fluid temperature, θ [see clause 7 a)];
- b) the speed as a function of rotational angle at constant flow, constant torque and constant temperature;
- c) the differential pressure as a function of the rotational angle at constant flow, constant torque and constant temperature;
- d) the geometric swept volume, V_g , or derived swept volume, V_i ;
- e) the mean rotational speed over one complete motor cycle, n_{ma} (see 9.1);
- f) the mean speed irregularity over one complete motor cycle, Δn_{ma} (see 9.3);
- g) the speed irregularity index, I_{r_n} (see 9.4);
- h) the average volumetric efficiency, $\eta_{v,ma}$ (see 9.5);
- i) the relative peak-to-peak value of speed, δn (see 9.6);
- j) the mean effective differential pressure over one complete motor cycle, $\Delta p_{e,ma}$ (see 9.8);
- k) the mean differential pressure irregularity over one complete motor cycle, $\Delta(\Delta p_{e,ma})$ (see 9.10);
- l) the differential pressure irregularity index, $I_{r_{\Delta p}}$ (see 9.11);
- m) the average hydraulic mechanical efficiency, $\eta_{hm,ma}$ (see 9.12);
- n) the relative peak-to-peak value of differential pressure, $\delta \Delta p$ (see 9.13).

Annex A (normative)

Classes of measurement accuracy

NOTE 3 The contents of this annex are under review and may be subject to amendment in the future.

A.1 Classes of measurement accuracy

Depending on the accuracy required, the test shall be carried out to one of three classes of measurement accuracy, A, B or C, as agreed by the parties concerned.

NOTES

4 Classes A and B are intended for special cases when there is a need to have the performance more precisely defined.

5 Attention is drawn to the fact that class A and B tests require more accurate apparatus and methods, which increase the costs of such tests.

A.2 Errors

Any device or method shall be used which by calibration or comparison with International Standards has been demonstrated to be capable of measuring with systematic errors not exceeding the limits given in table A.1.

NOTE 6 The limits given in table A.1 are percentage limits for speed, output torque, total input flow and inlet/output pressure and are based on the value of the quantity being measured and not on the maximum scale reading of the instrument. The limits for temperature are in degrees Celsius and are not percentage limits.

Table A.1 — Permissible systematic errors of measuring instruments as determined during calibration

Parameter of measuring instrument	Permissible systematic errors for classes of measurement accuracy		
	A	B	C
Speed, n_g , %	$\pm 0,5$	± 1	± 2
Output torque, $T_{2,e}$, %	$\pm 1,5$	± 3	± 5
Total input flow, $q_{v1,t,e}$, %	± 2	± 4	± 6
Inlet/outlet pressure, $p_{1,e}$ and $p_{2,e}$, %	$\pm 0,8$	$\pm 1,5$	± 3
Inlet temperature, $\theta_{1,e}$, °C	$\pm 0,5$	± 1	± 2

Annex B (normative)

Use of practical units

The results of tests, given either in tabular or graphical form, may be presented using the practical units given in table B.1.

Table B.1 — Practical units

Quantity	Symbol	SI unit	Practical units
Rotational speed	n	r/min	r/min
Pressure, differential pressure	$p, \Delta p$	Pa	bar ¹⁾
Flowrate	q	m ³ /s	dm ³ /s ²⁾
Torque	T	N·m	N·m
Time	t	s	s, ms
Swept volume	V	m ³	dm ³
Temperature	θ	°C	°C
1) 1 bar = 10 ⁵ Pa = 10 N/m ² = 0,1 MPa 2) 1 dm ³ = 1 litre			

(Continued from second cover)

<i>International Standard</i>	<i>Corresponding Indian Standard</i>	<i>Degree of Equivalence</i>
ISO 5598 : 1985 Fluid power systems and components — Vocabulary	IS 10416 : 1992 Fluid power systems and components — Vocabulary (<i>first revision</i>)	Identical

The Technical Committee responsible for the preparation of this standard has reviewed the provisions of the following International Standard and has decided that the same is acceptable for use in conjunction with this standard:

<i>International Standard</i>	<i>Title</i>
ISO 8426 : 1988	Hydraulic fluid power — Positive displacement pumps and motors — Determination of derived capacity

For the purpose of deciding whether a particular requirement of this standard is complied with, the final value, observed or calculated, expressing the result of a test or analysis, shall be rounded off in accordance with IS 2 : 1960 'Rules for rounding off numerical values (*revised*)'. The number of significant places retained in the rounded off value should be the same as that of the specified value in this standard.

Bureau of Indian Standards

BIS is a statutory institution established under the *Bureau of Indian Standards Act*, 1986 to promote harmonious development of the activities of standardization, marking and quality certification of goods and attending to connected matters in the country.

Copyright

BIS has the copyright of all its publications. No part of these publications may be reproduced in any form without the prior permission in writing of BIS. This does not preclude the free use, in the course of implementing the standard, of necessary details, such as symbols and sizes, type or grade designations. Enquiries relating to copyright be addressed to the Director (Publications), BIS.

Review of Indian Standards

Amendments are issued to standards as the need arises on the basis of comments. Standards are also reviewed periodically; a standard along with amendments is reaffirmed when such review indicates that no changes are needed; if the review indicates that changes are needed, it is taken up for revision. Users of Indian Standards should ascertain that they are in possession of the latest amendments or edition by referring to the latest issue of 'BIS Catalogue' and 'Standards : Monthly Additions'.

This Indian Standard has been developed from Doc : No. **MGP 15 (446)**.

Amendments Issued Since Publication

Amend No.	Date of Issue	Text Affected

BUREAU OF INDIAN STANDARDS

Headquarters:

Manak Bhavan, 9 Bahadur Shah Zafar Marg, New Delhi 110 002
Telephones : 2323 0131, 2323 3375, 2323 9402 Website : www.bis.org.in

Regional Offices :

Telephones

Central	: Manak Bhavan, 9 Bahadur Shah Zafar Marg NEW DELHI 110 002	{ 2323 7617 2323 3841
Eastern	: 1/14 C. I. T. Scheme VII M, V. I. P. Road, Kankurgachi KOLKATA 700 054	{ 2337 8499, 2337 8561 2337 8626, 2337 9120
Northern	: SCO 335-336, Sector 34-A, CHANDIGARH 160 022	{ 260 3843 260 9285
Southern	: C. I. T. Campus, IV Cross Road, CHENNAI 600 113	{ 2254 1216, 2254 1442 2254 2519, 2254 2315
Western	: Manakalaya, E9 MIDC, Marol, Andheri (East) MUMBAI 400 093	{ 2832 9295, 2832 7858 2832 7891, 2832 7892

Branches: AHMEDABAD. BANGALORE. BHOPAL. BHUBANESHWAR. COIMBATORE. FARIDABAD. GHAZIABAD. GUWAHATI. HYDERABAD. JAIPUR. KANPUR. LUCKNOW. NAGPUR. NALAGARH. PATNA. PUNE. RAJKOT. THIRUVANANTHAPURAM. VISAKHAPATNAM.